



**PARTIALLY SCANNED
OVERSIZE ITEM(S)**


To use the paper copy of oversize document # 2266501
contact the Region IX Superfund Records Center

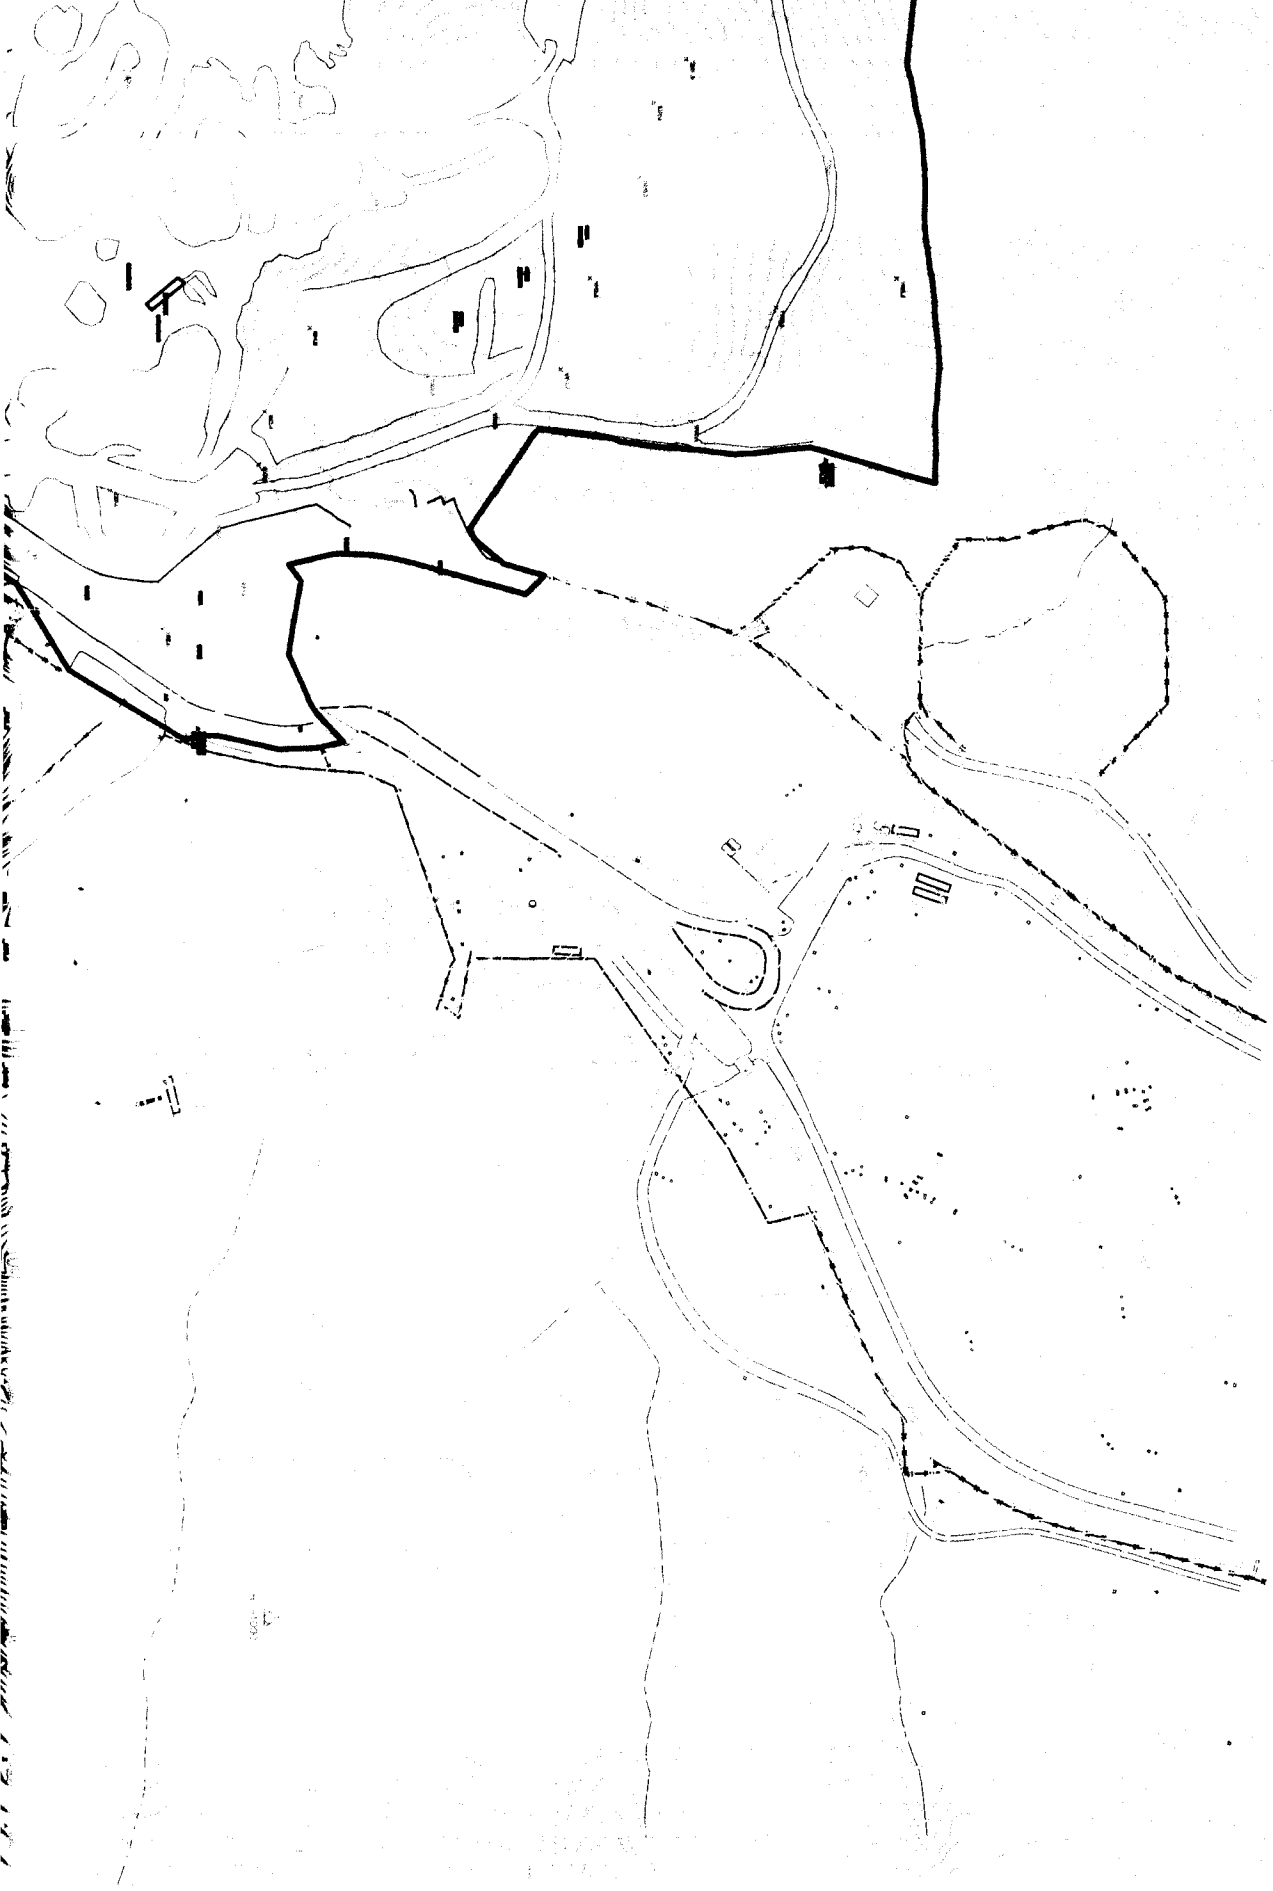

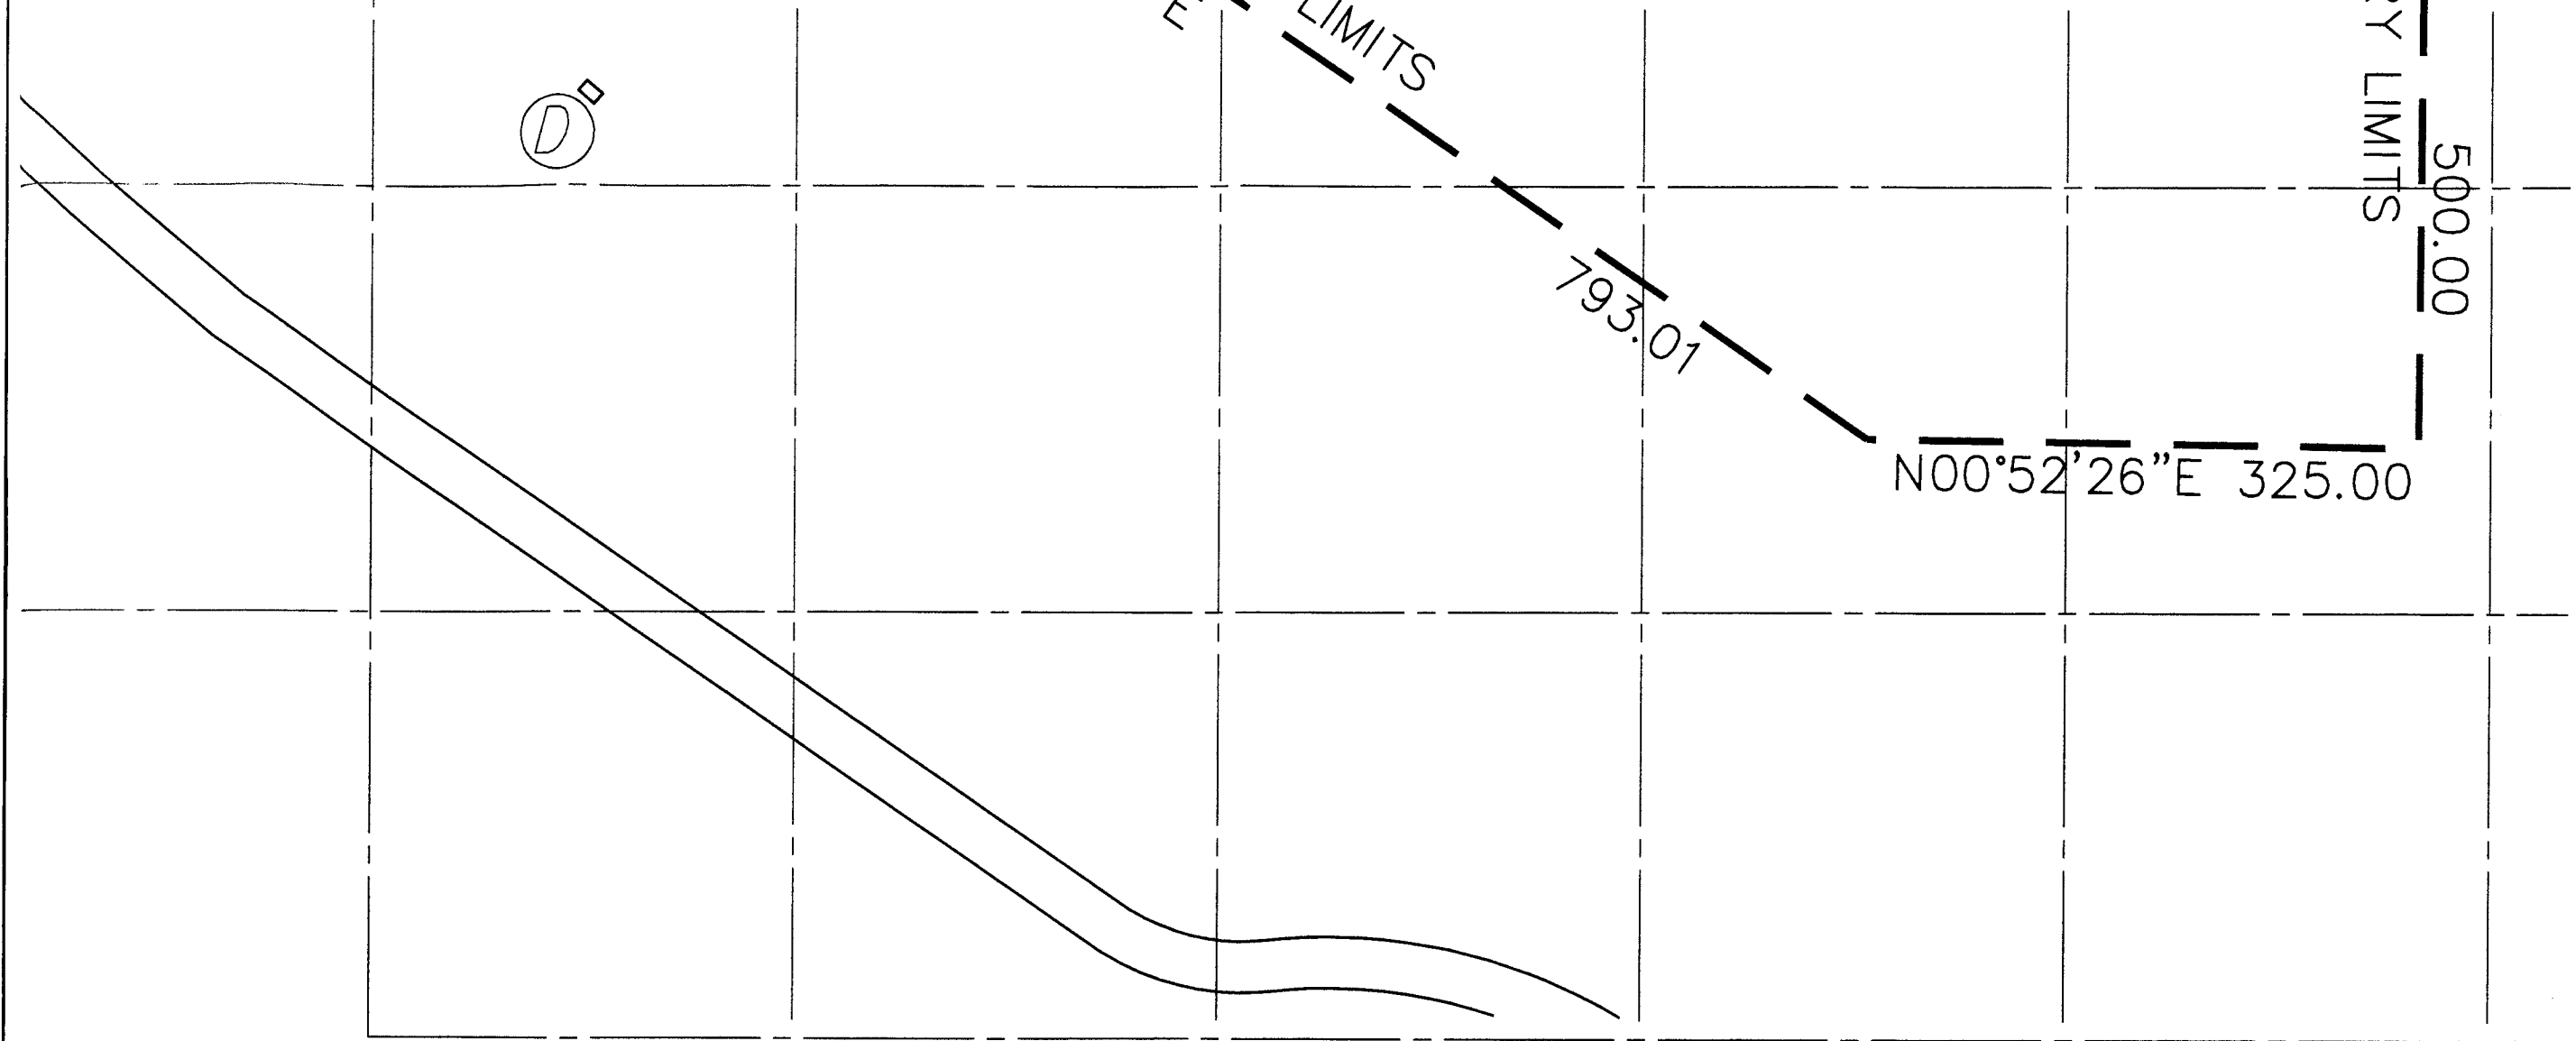

3Y	DATE _____	Southland Engineering 2200 BUSINESS WAY, Ste. 100 RIVERSIDE, CA. 92501 (951) 788-8488	BUSINESS EMERGENCY PLAN BUILDING LAYOUT AND SITE PLAN		SHEET NO.
EXP. DATE _____	1				
SUPERVISION OF	DATE _____		OF 1 SHTS.		
SCALE 1"=100'	BENCHMARK		FILE NO.		
33	EXP. DATE 3-31-13	DATE _____	FOR PYRITE QUARRY MINE	W.O. 10102	

APPROVED BY _____ DATE _____	<div>Southland Engineering</div> <div>2200 BUSINESS WAY, Ste. 100 RIVERSIDE, CA. 92501 (951) 788-8488</div>	BUSINESS EMERGENCY PLAN BUILDING LAYOUT AND SITE PLAN		SHEET NO. 2
R.C.E. NO. _____ EXP. DATE _____		FOR PYRITE QUARRY MINE		OF 2 SHTS.
PREPARED UNDER THE SUPERVISION OF _____ DATE _____				FILE NO.
ALLEN W. MARTIN R.C.E. NO. 38463 EXP. DATE 3-31-13	SCALE _____ DATE _____	BENCHMARK _____		W.O. 10102

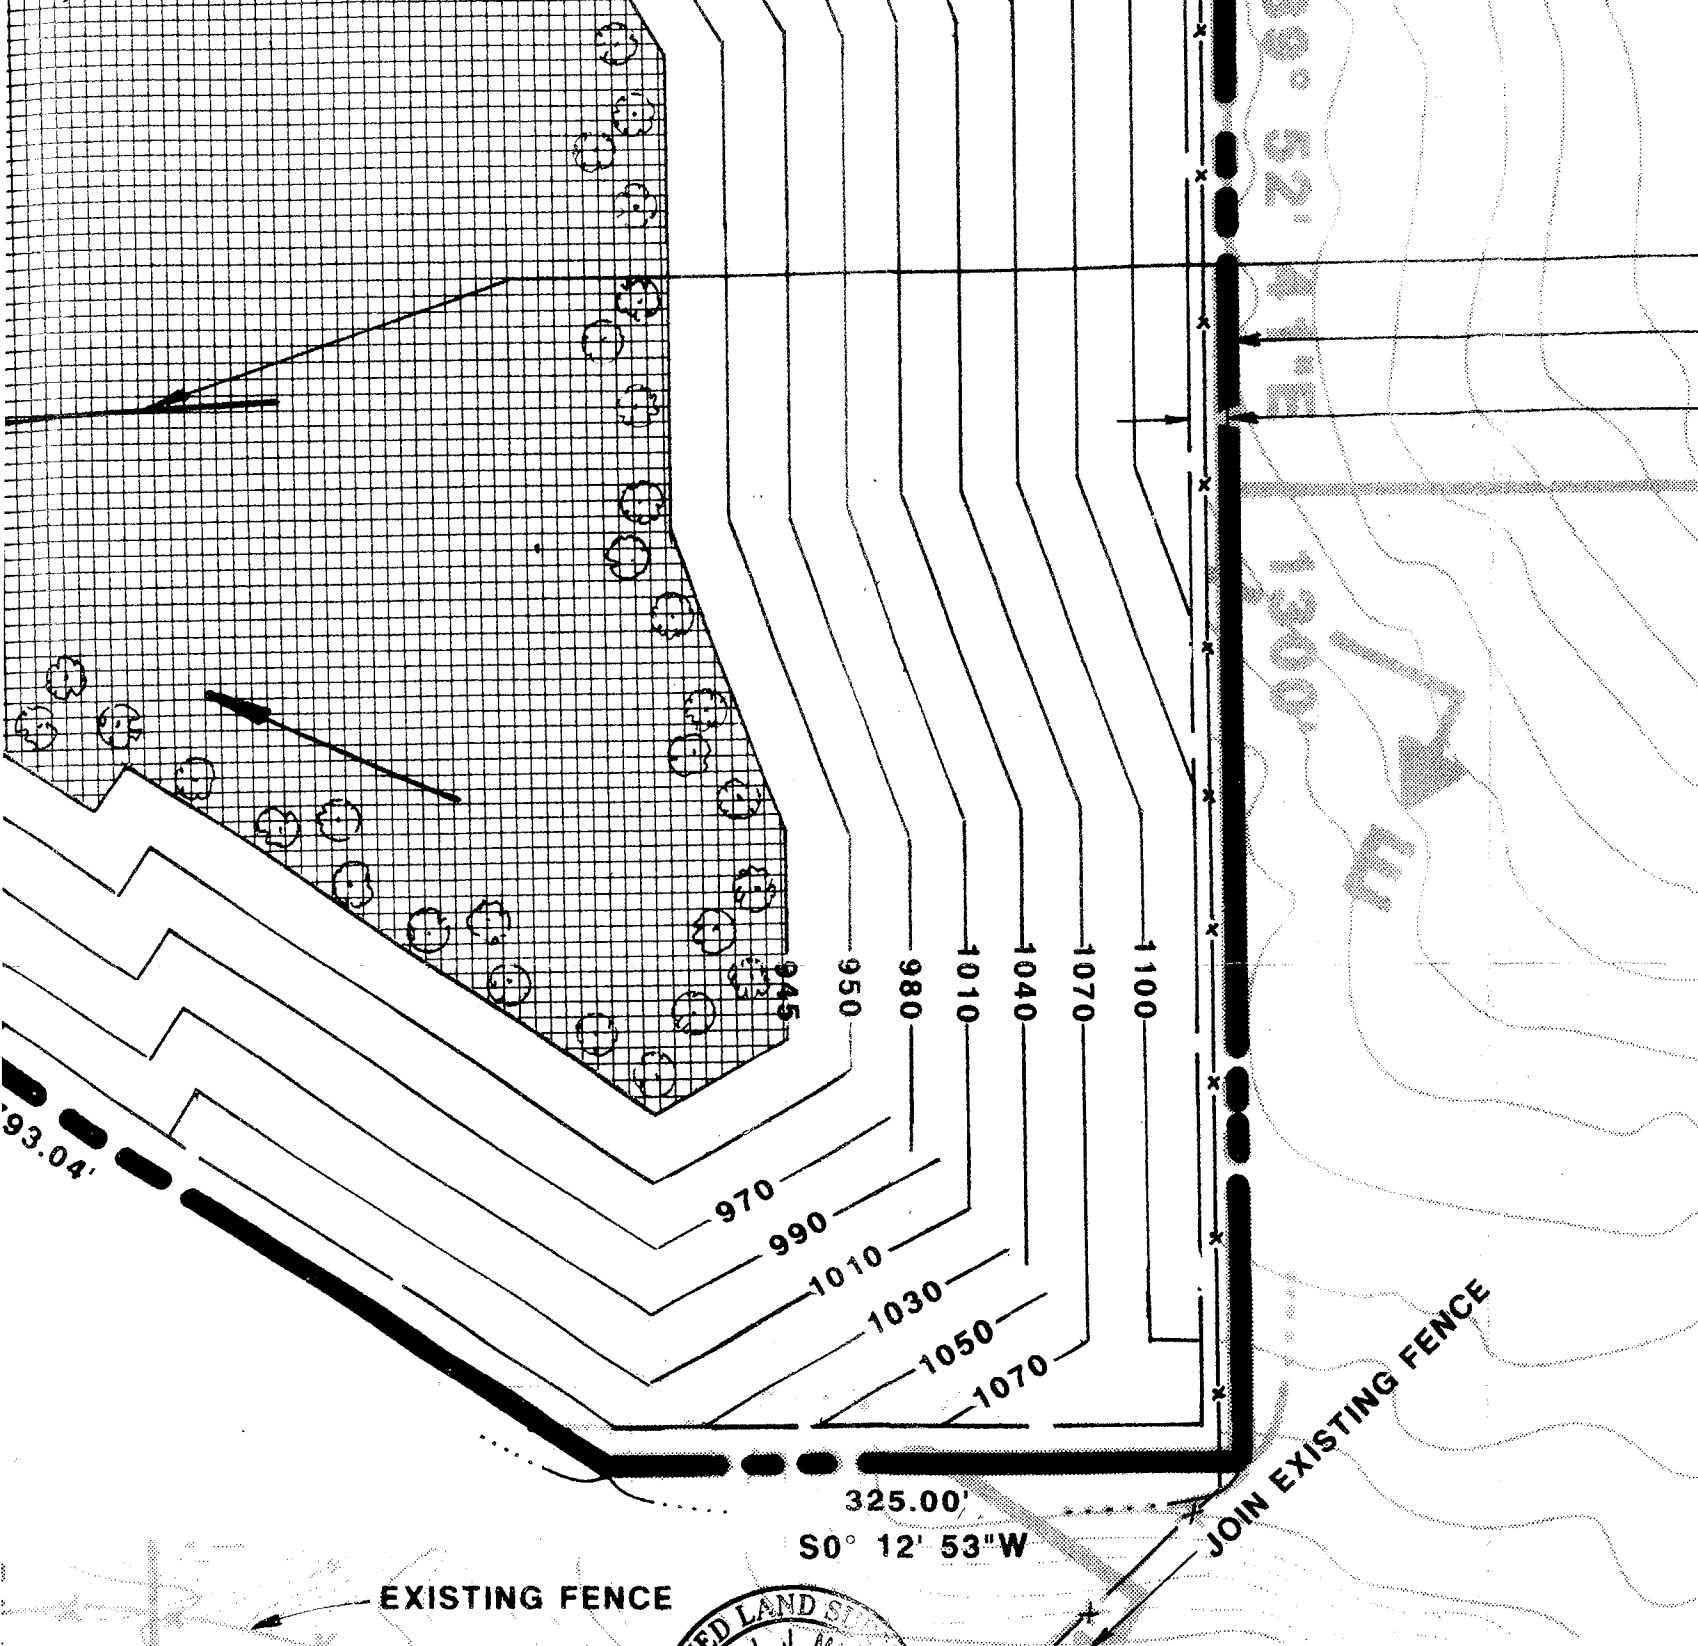

- 40% - STIPA PULCHRA - PURPLE STIPA *
- 10% - SALVIA MELLIFERA - BLACK SAGE *
- 10% - ERIOGONUM FASCICULATION - CALIF. BUCKWHEAT *

* INDICATES PLANTS DOMINANT TO AREA

- DIRECTION OF SITE RUN-OFF
- LIMITS OF RECLAMATION PLAN
- 20' WIDE BENCH

GENERAL NOTES

1. Remove all existing structures, debris, etc. from site prior to planting.
2. Post warning signs labeled "No Trespassing" along perimeter fencing at intervals of 250 feet or less.
3. Gates will be constructed of either barb wire on board or chain link. All gates should be locked when owner is not present.
4. All grades, contours, access roads, etc. as shown on plan are estimated to the date of 2012 A.D.


PLANTING NOTES

1. Hydromulch misture will include commercially prepared fertilizer and be composed of the following ingredients.

Available nitrogen	10%
Available phosphorus	20%
Available potash	20%
2. Tree Staking. Provide stakes of sound new hardwood, treated softwood, or redwood, free of knot holes and other defects.
3. Tree Staking. Provide wire ties and retain guys of 2-strand, twisted, pliable galvanized iron wire not lighter than 12 ga. with zinc coated turnbuckles.

		prepared under the	prepared for: PAUL J. & LUCILE HUBBS 140 WEST VALLEY BLVD RIALTO, CALIF. 92376 (714) 877-2726	date	sheet
		of:			
		drawn: _____ checked: _____			MAY, 1990
		j.o.no. 89-5-6			of
					5
				DWG. NO.	E-1724

YES

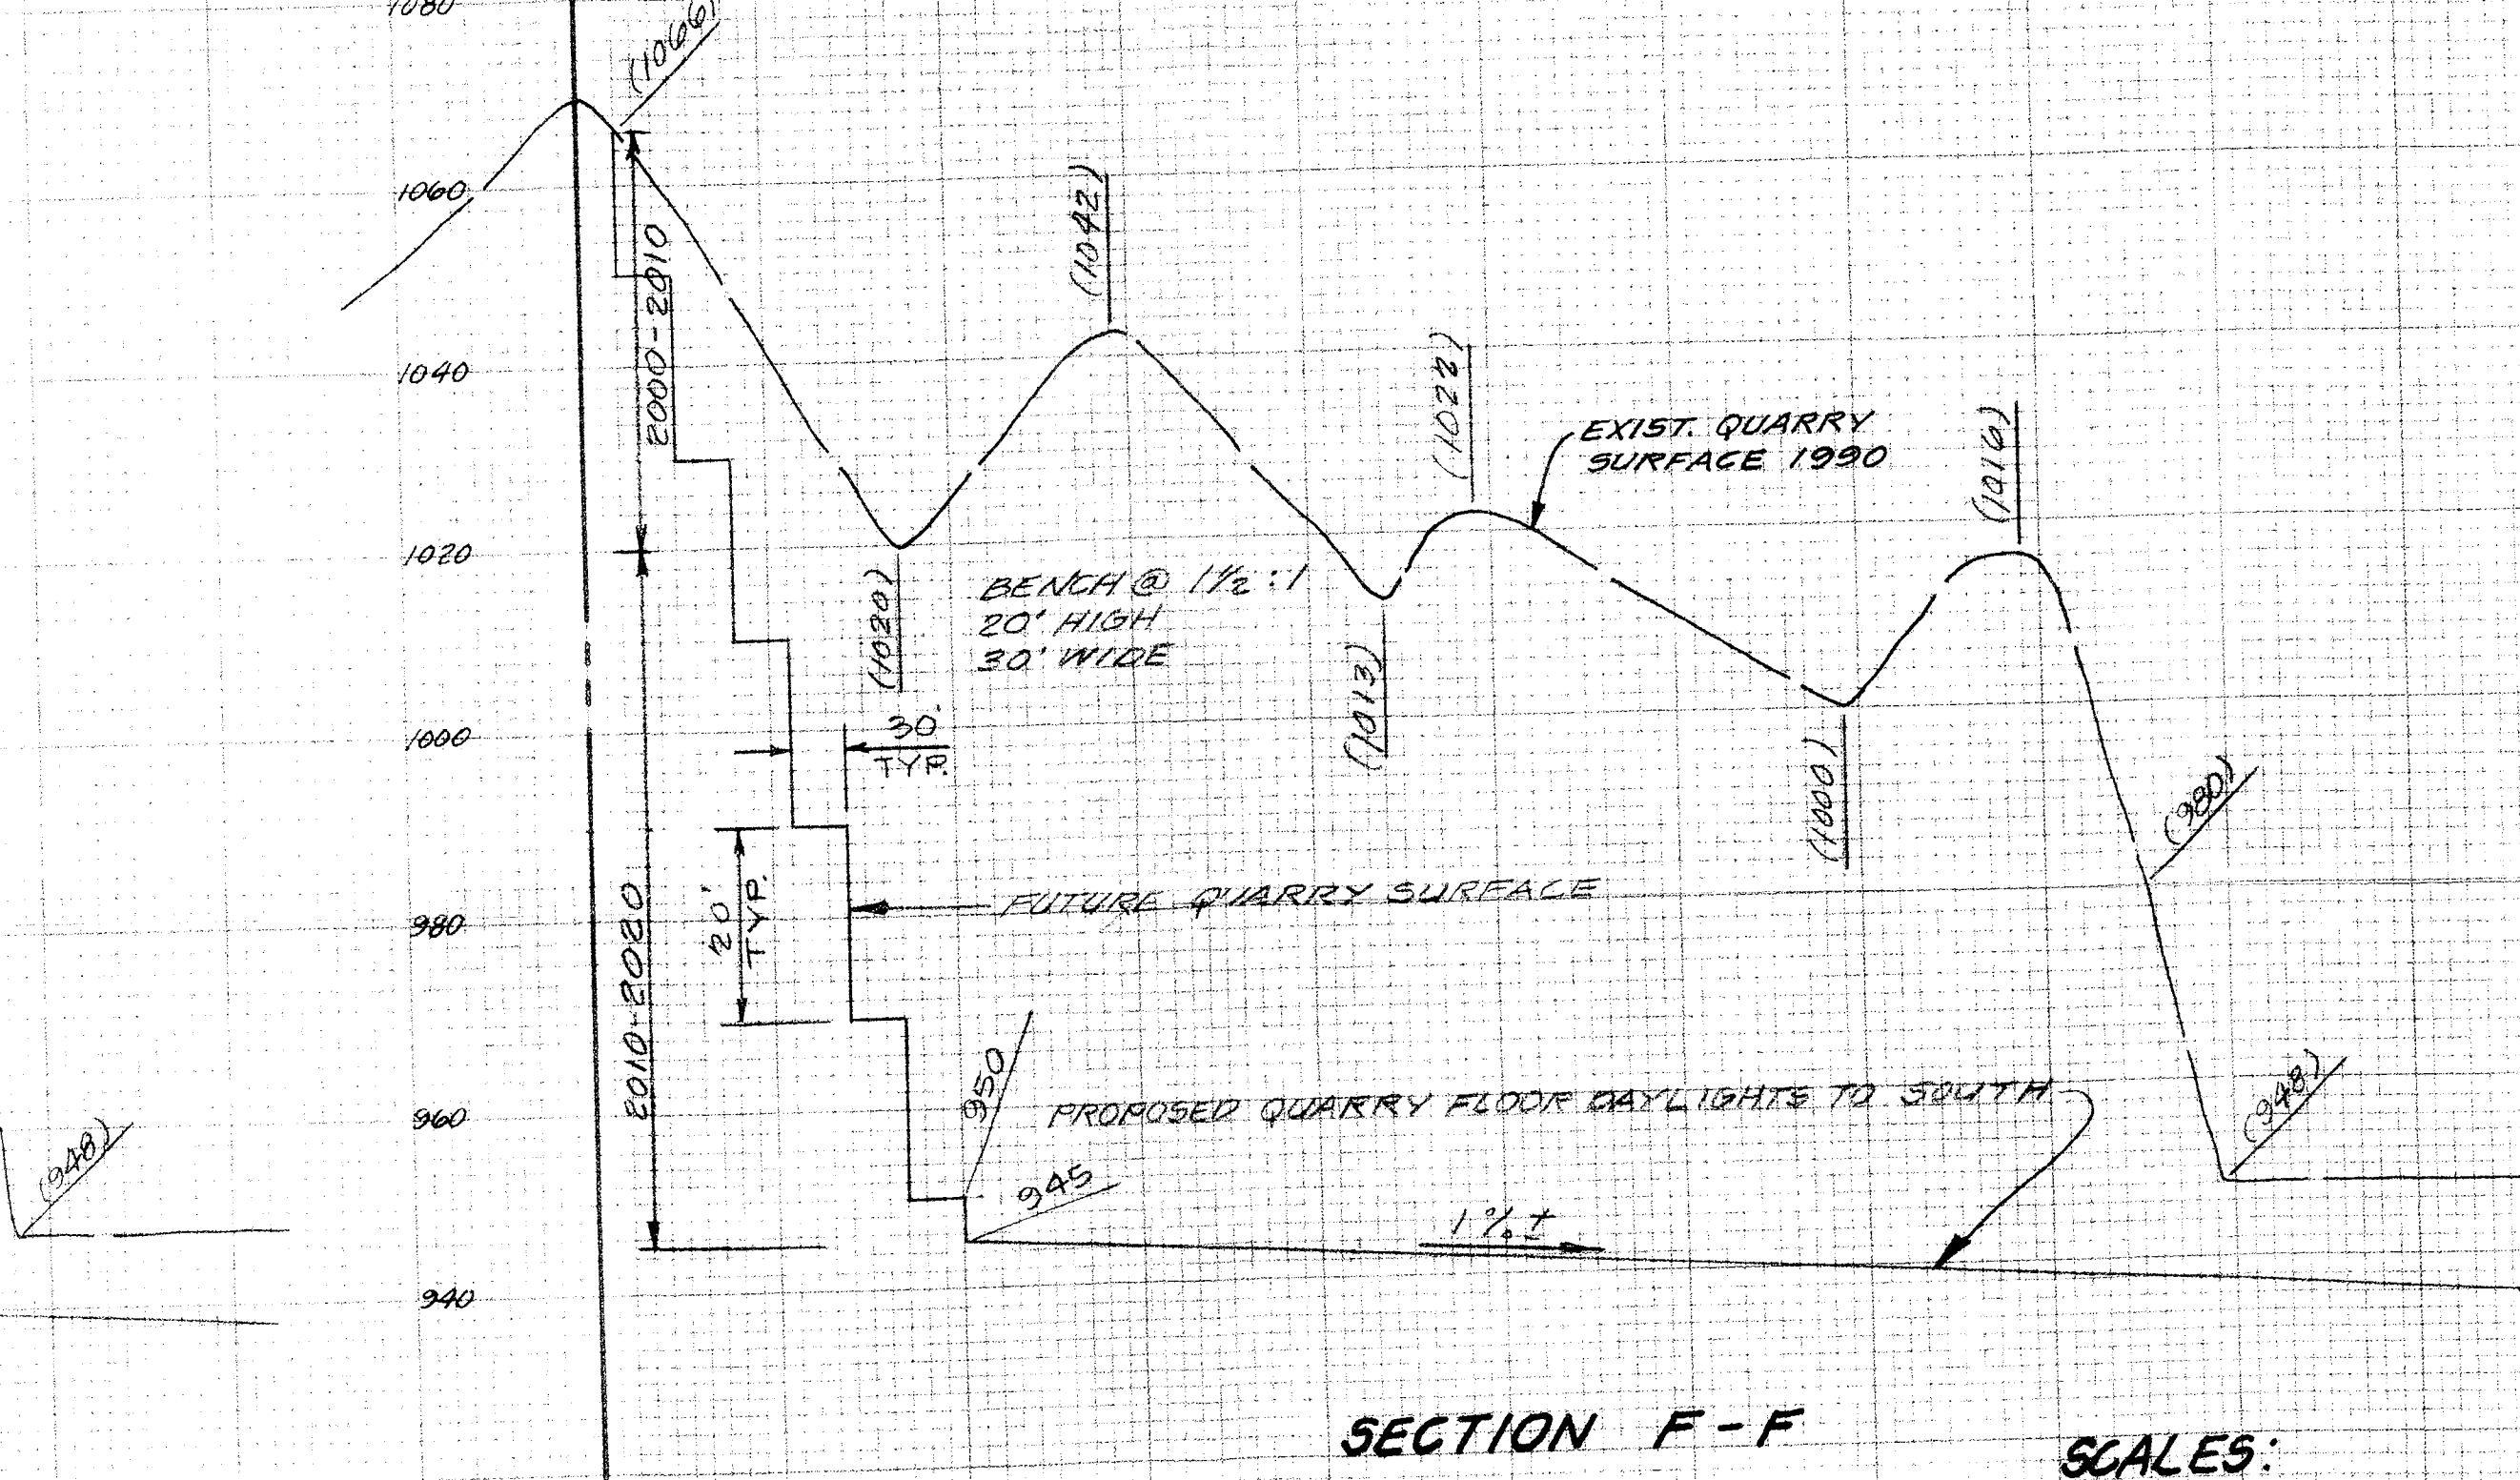


SCALES:
HORIZ: 1" = 100'
VERT: 1" = 20'

IRY

NO. 1794—CROSS SECTION 10 x 10
"CLEARPRINT PAPER CO."
MADE IN U.S.A.

MAY, 1990
SHT. 4
SFUND RECORDS CTR
2266501 (5 of 8)

E - 1724

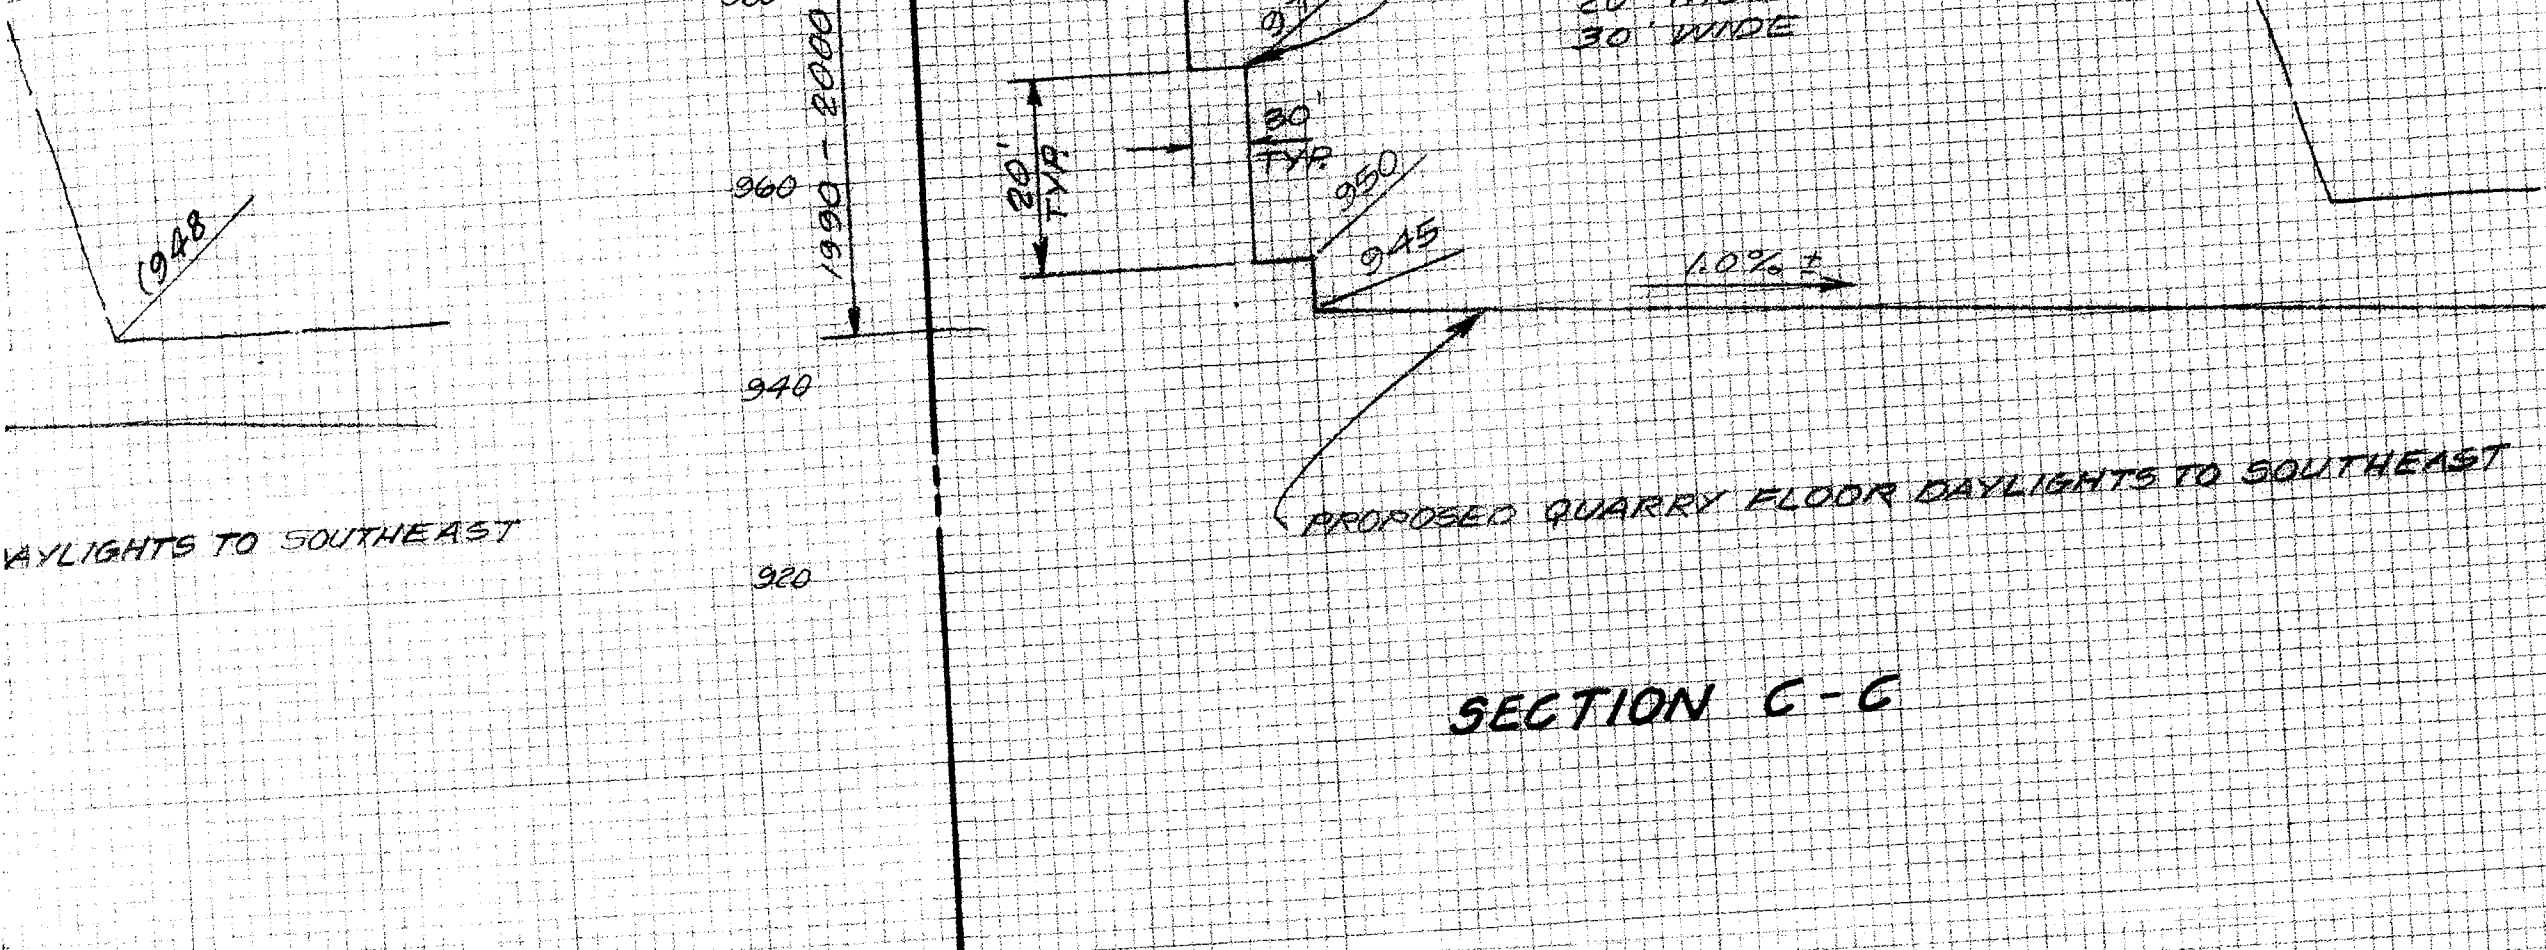

SCALES:
 HORIZ. 1" = 100'
 VERT. 1" = 20'

REVISED SECTION C-C 8-30-90


NO. 1294—CROSS SECTION 10 x 10
 "CLEARPRINT PAPER CO."
 MADE IN U.S.A.

RRY

SFUND RECORDS CTR
 2266501 (6 of 8)

MAY, 1990
 SHT. 3

E - 1724


[illegible]

COR. OF SECTION 1

PAUL J. & LUCILE HUBBS
140 WEST VALLEY BLVD
RIALTO, CALIF. 92376
(714) 877-2726


1724

SFUND RECORDS CTR
2266501 (7 of 8)

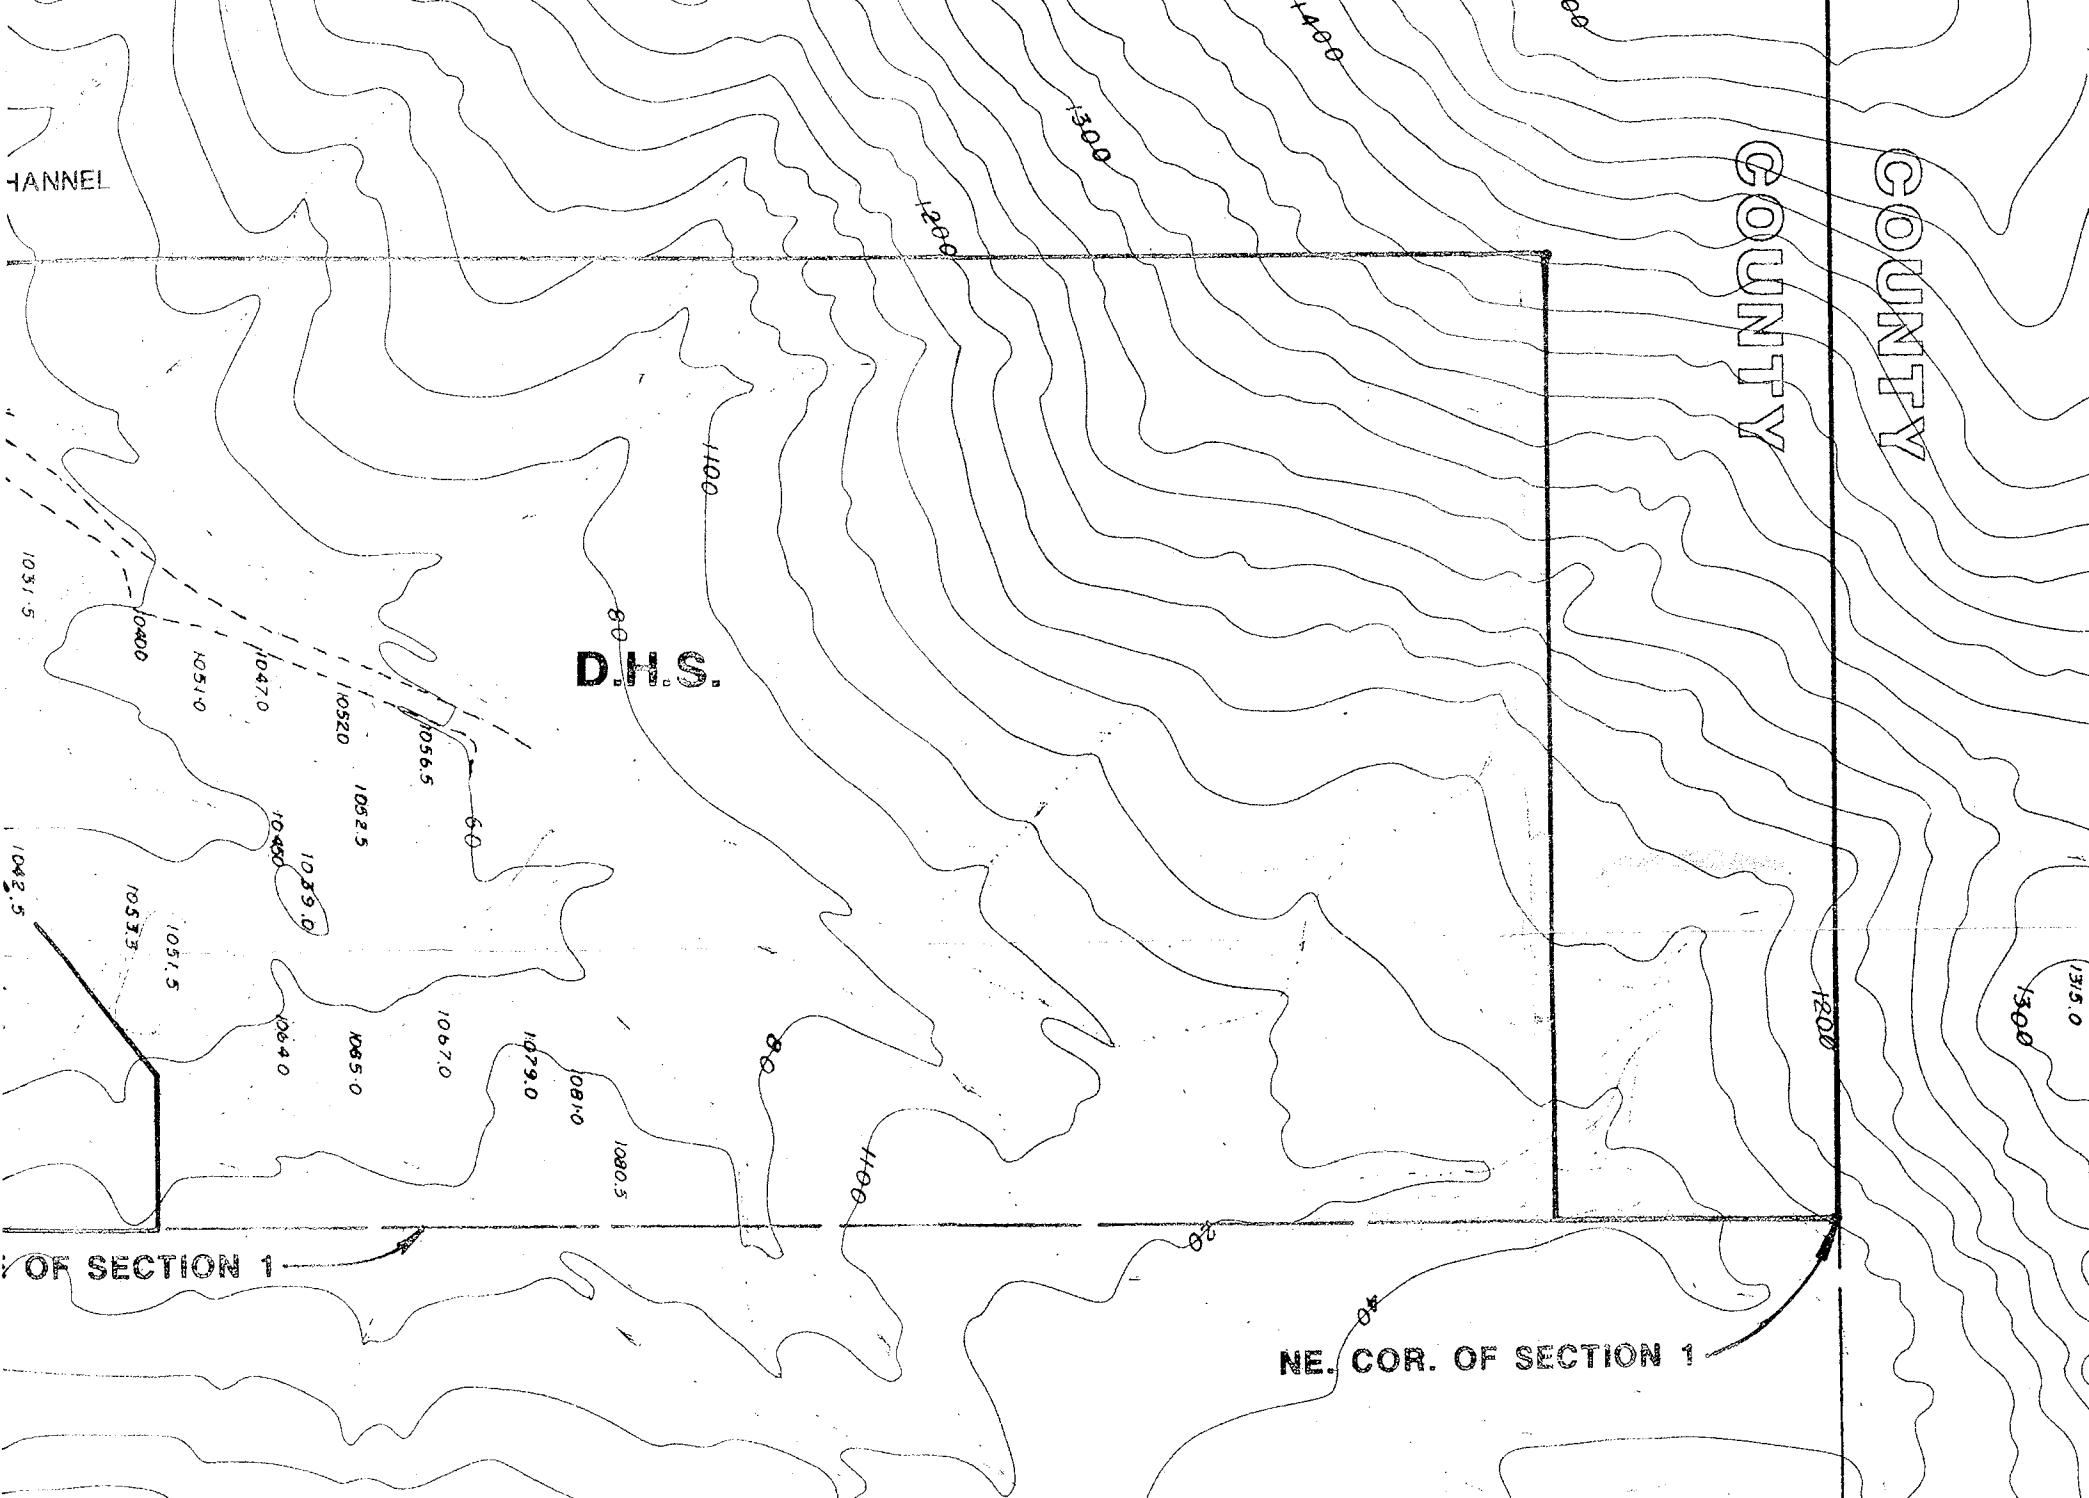

Thence North 0°12'53" East, along said Westerly line of the East one-half of said Section, a distance of 568.10 feet to the Northerly line of the Southerly 568.09 feet of the Northwest one-quarter of said Section;
Thence North 89°52'41" East along the last described Northerly line, a distance of 1300.00 feet;
Thence South 0°12'53" West, parallel with said Westerly line of the East one-half of Section 1, a distance of 325.00 feet;
Thence South 33°52'54" West, a distance of 793.04 feet;
Thence South 0°12'53" West, a distance of 575.00 feet;
Thence South 33°52'54" West, a distance of 650.00 feet to a point that bears South 89°47'07" East, 500.00 feet from the True Point Of Beginning;
Thence North 89°47'07" West, 500.00 feet to the True Point Of Beginning.

Containing approximately 54.2 acres.

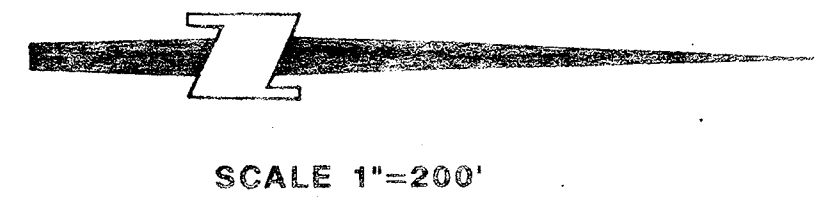

		prepared under the	prepared for: PAUL J. & LUCILE HUBBS 140 WEST VALLEY BLVD RIALTO, CALIF. 92376 (714) 877-2726	date	sheet 1 of 5	
		of:		MAY, 1990		
					j.o.no.	89-5-6
		drawn or checked:			DWG. NO.	E-1724